Directory

Produce overview

Accessories

NO	Item	Quantity
1	Remote control	1
2	5V/2A power	1
3	User manual	1

PS Different model have different accessories, please check it before your order them

No.1：Explanation of the remote control

1.0：Remote control button definition：

Power on/off

TV mode selection

Setup

DVDROM eject

control USB DVD ROM to slot in or eject

Menu

During DVD playback, press this key to return to

DVD menu contents; During Blu-ray playback, press

this key to select Volume, Subtitle, Chapter

Number key

Input numbers

Home key

back to the main menu

Return key

return to the previous menu

Arrows

up/down/left/right

信息 Info key

During playback, press this button to show the information of the movie (Video format, file name, audio format, play process)

上一曲 Under playback

Use these two buttons to select previous or next scene

快退 **快进** Rewind back and fast forward key

Rewind has 1、1.5、2、4、8、16 times selections，fast forward has 1.5、2、4、8、16、32 times selections，press "play" to return to playback mode

循环 Repeat key

When playback, It has repeat one, repeat all, repeat canceling such models

音轨 Audio-track switch

Use when playing Multi-audio track files

选时 Time seek

Choose a specific time to start playing movies

静音 Mute

VOL+ 、 **VOL−** Volume up and down key

OK Confirm

播放暂停 Play and pause

停止 Stop

Stop playing the files, and go back to the content list

慢放 Slow

During playing, press this key to slow down. To Indicate speed: 3/4X、1/2X 、1/4X 、1/8X、1/16X、1X icon will appear

AA字幕 Subtitle

If the movie has subtitle press this key to display or cancel subtitle, user can use up/down key to adjust color/size/location/time/size

● Bookmark

□ Picture switching

16:9/4:3

缩放 Zoom

During playback, press this key ,you can found modes of 0.9x、1x、2x、3x、4x、8x, with arrow keys to move movies

During picture browsing, press this key, you can found modes of 2x、4x、8x、16x、Fit, with arrow keys to move pictures

标题 Title

Use during DVD mode

Four color button

Function is different under different menu

NO.2: Connecting your media player

2.0: Connector indication

※ DC 5V

※ HDMI 1.3

※ R/L

※ COMPOSITE

※ OPTICAL

※ USB HOST

2.1: Connecting method

2.1.1: Power adapter connection

2.1.2: AV connection

2.1.3: HDMI connection

2.1.4: Optical connection

2.1.5: HDMI pass through connection
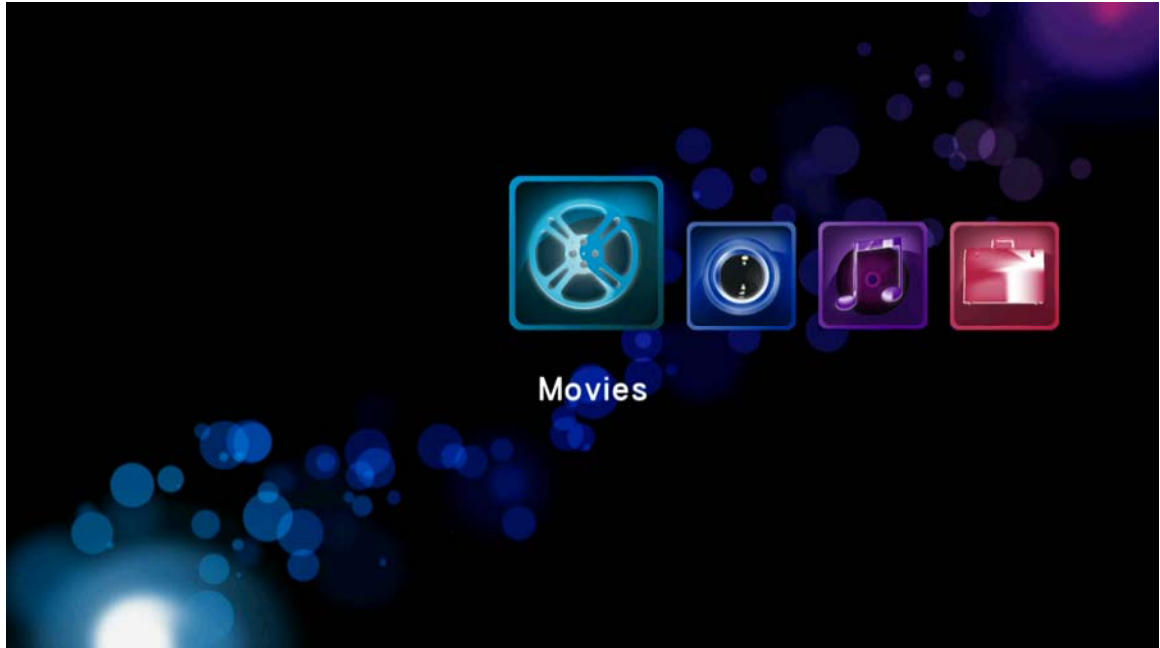

2.1.6: USB connection

2.1.7: Play video

No.3：Specification

CPU	400MHZ
DDR2	128MB
NOR FLASH	256MB
Power adapter	DC5V/2A
Video output	AV output HDMI 1.3a output
Audio output	Stereo output SPDIF optical output
USB HOST	480Mbps USB2.0 HOST×2, connect with USB device, such as USB HDD、digital camera、USB card reader、USB DVD ROM
Temperature	Work temp:+5～+50 degree; humidity：＜90% Save temp: -20～+70 degree; humidity：＜95%
Display Equipment	LCD TV:480P/576P/720P/1080i/1080P 、 PDPTV 1366X768, 1280X768 、 TV PAL:576i/576P NTSC:480i/480P、Analog projector: YPbPr, AV Video、Digital projector: HDMI 720P/1080P
Display resolution	480i/576i/480P/576P/720P/1080i/1080P
Video format	MPEG (MPEG-TS, MPEG-PS, VOB, and M2TS) (typical file extensions: .MPG, .TS, .M2TS, .TP, .VOB). AVI (typical file extensions: .AVI). MOV, MP4 (typical file extensions: .MOV, .MP4, .QT). MKV (typical file extensions: .MKV). ASF (typical file extensions: .ASF, .WMV). RM/RMVB (typical file extensions: .RM, .RMVB). DVD-ISO, VIDEO_TS (DVD-Video playback, including DVD menu support). BD-ISO， BDMV（BD-Video Playback，including BD simple menu support）

	Raw video. Raw audio (typical file extensions: .WAV, .MP3).
Video codec	MPEG-1/2/4 , WMV9/VC-1, H.264.AVC, Dvix, Xvid Real Networks（RM/RMVB）8/9/10 Full-pixel JPEG decode with High resolution
Audio format	AAC, M4A MPEG audio (MP1, MP2, MP3, MPA) WAV OGG. APE.FLAC
Audio codec	MPEG1 layer1/2/3 , MPEG-2 LC-AAC , MPEG-4 LC-AAC, Dolby digital, DTS digital, DTS-HDMA/DTS-HDHR(pass through) TRUEHD （pass-through） Blue ray LPCM, WMA RA1/RA-cook/RA-lossless OGG/APE/FLAC
Picture format	JPEG BMP PNG GIF
Subtitle format	Plug-in SRT;SSA/ASS;SMI;IDX+SUB In MKV: plain text, SSA/ASS.
Menu language	Simplified Chinese/ Traditional Chinese English/Spanish/Russian/Czech/Dutch/Italian/French/German/Turkish/Hebrew
Subtitle language	Simplified Chinese/ Traditional Chinese Turkish/Greece/Hebrew/Czech SE European, Central European, Cyrillic, Western, Unicode (UTF8)
HDD partition	FAT32, NTFS
Unit size	134 x102 x 28mm
Accessories	Remote control 1pcs 5V/2A power adapter 1pcs User manual 1pcs AV Cable 1pcs

No.4：Interface
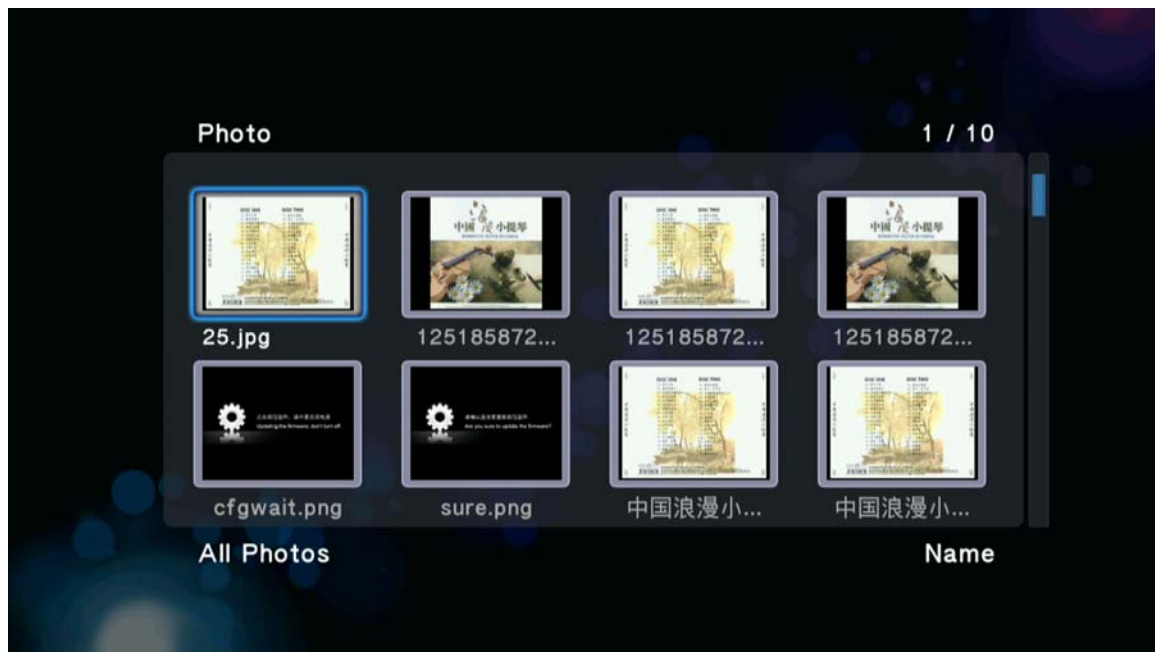
4.0: Movie

4.2: Movie listing

Note: 1）Press 🔲缩放 to zoom, you can find modes of 1x、2x、3x、4x、8x, with arrow keys on display, to move movie

2）Press ⌖选时 to choose the play time

3）Press AA字幕 to adjust the display or cancel subtitle, color/size/location/time/size

4）Press ▷◁音轨 to adjust the Audio-track

5）Press ▭菜单 to adjust the audio, subtitle and others

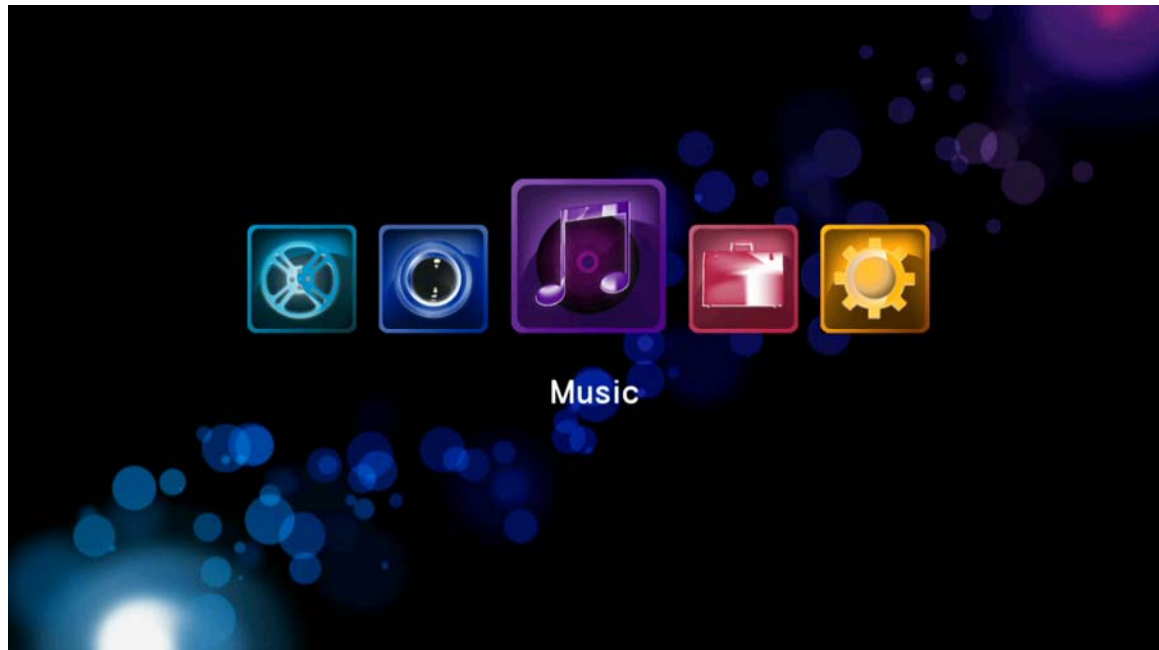6) Press the arrows (left/right key) ◂◆▸ to choose previous or next movie

4.3 Picture

4.3.0: Picture listing

1）Press the arrows(left/right key) ◂◆▸ to choose the previous or next picture

2） Press ▣播放 ,you can zoom in 2x、4x、8x、16x、Fit and rotate the picture under the Fit
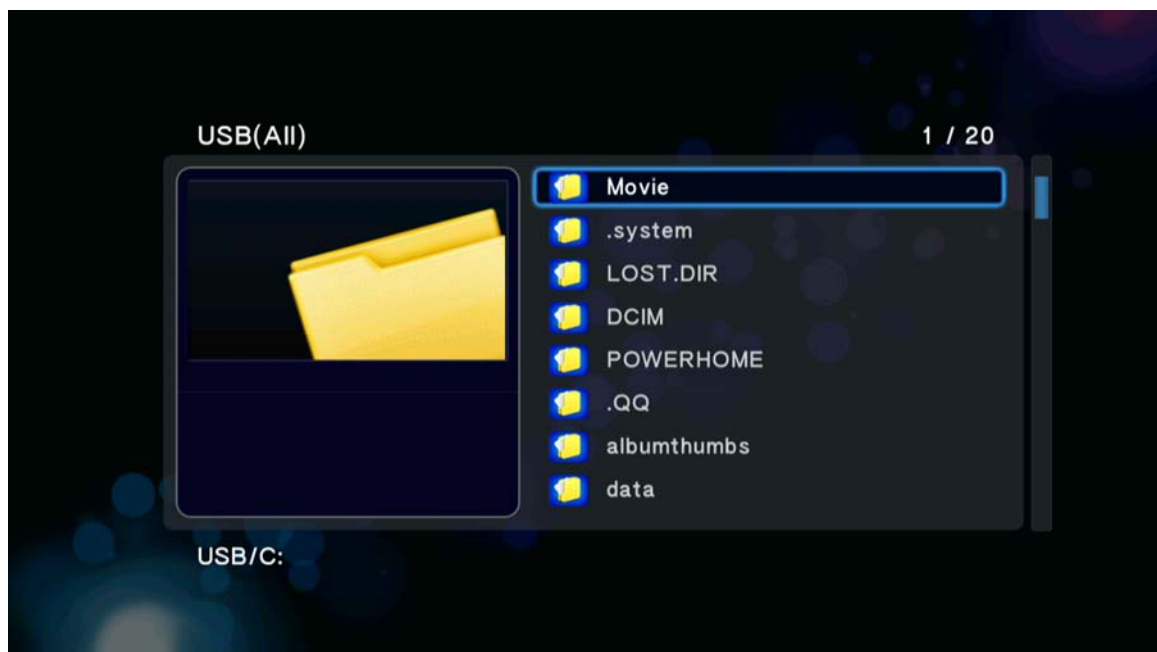
4.4: Music

4.4.0: Music listing

1）![previous/next button] Under playback, use these two buttons to select previous or next song

2）Press ![menu button] to choose the playing mode

3）Support APE, FLAC format

4) Press the Home button to play the picture at the same time
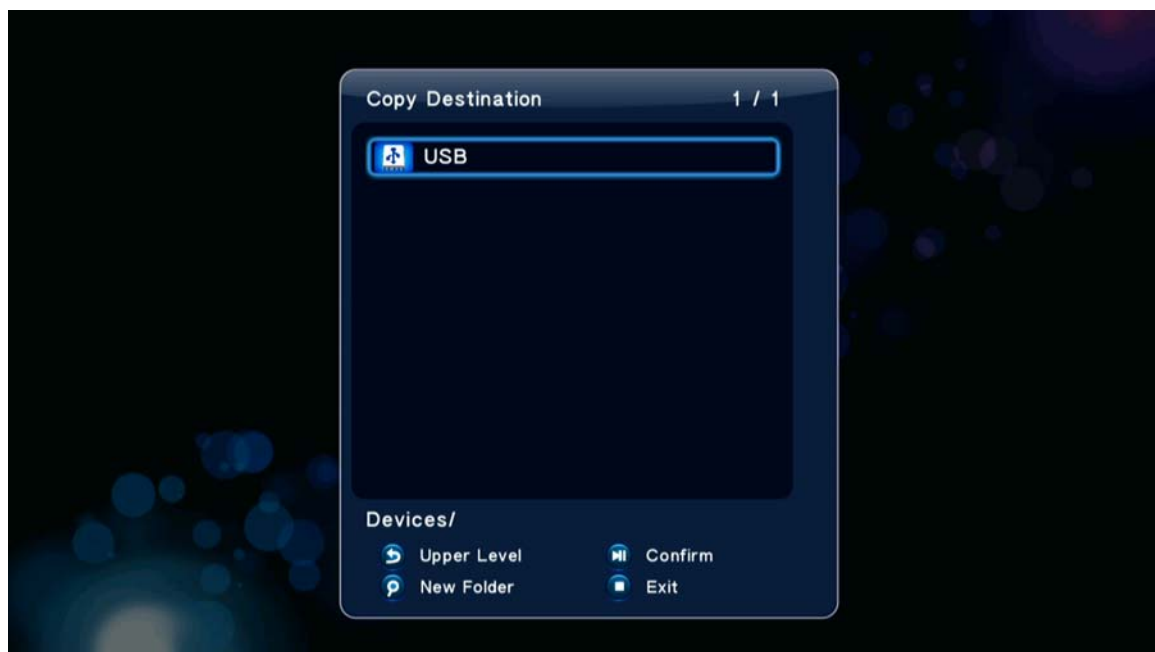
4.5: Files

4.5.0: Files listing

4.5.1:File copy,delete,move and rename

Notice: you can go to interface (see picture above) when you press the color button

1) In destination, choose the target device ,USB disk, SATA hard disk or other mobile disk

2) Return (use this button to return to the previous menu item)
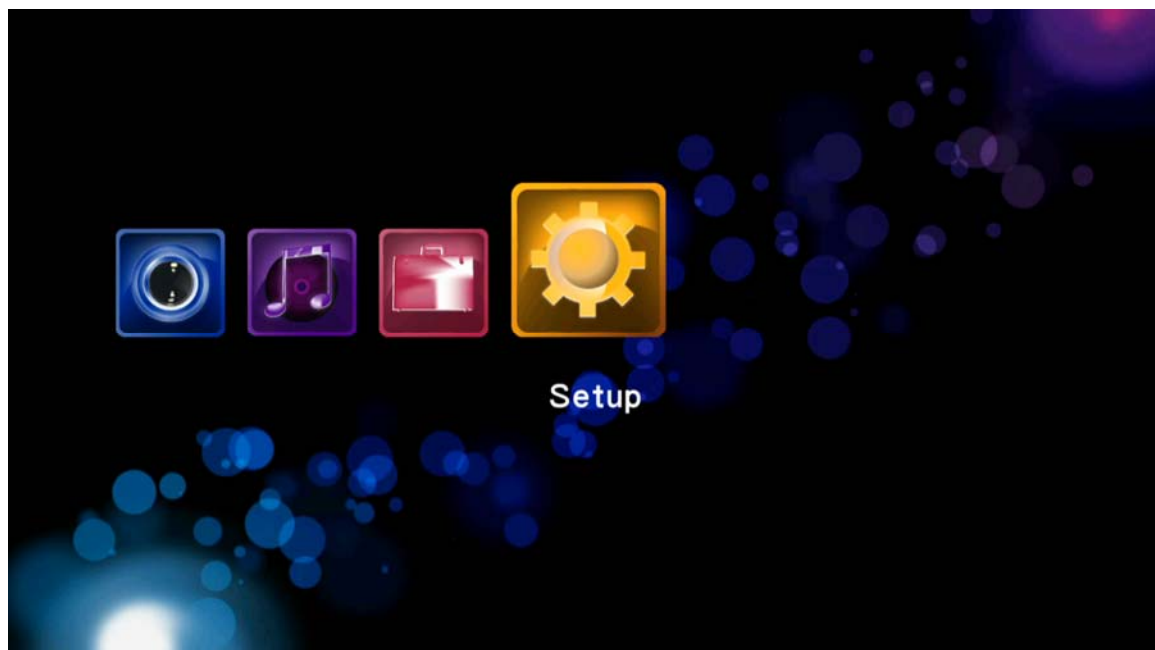
 Play /pause key

15

 Stop key

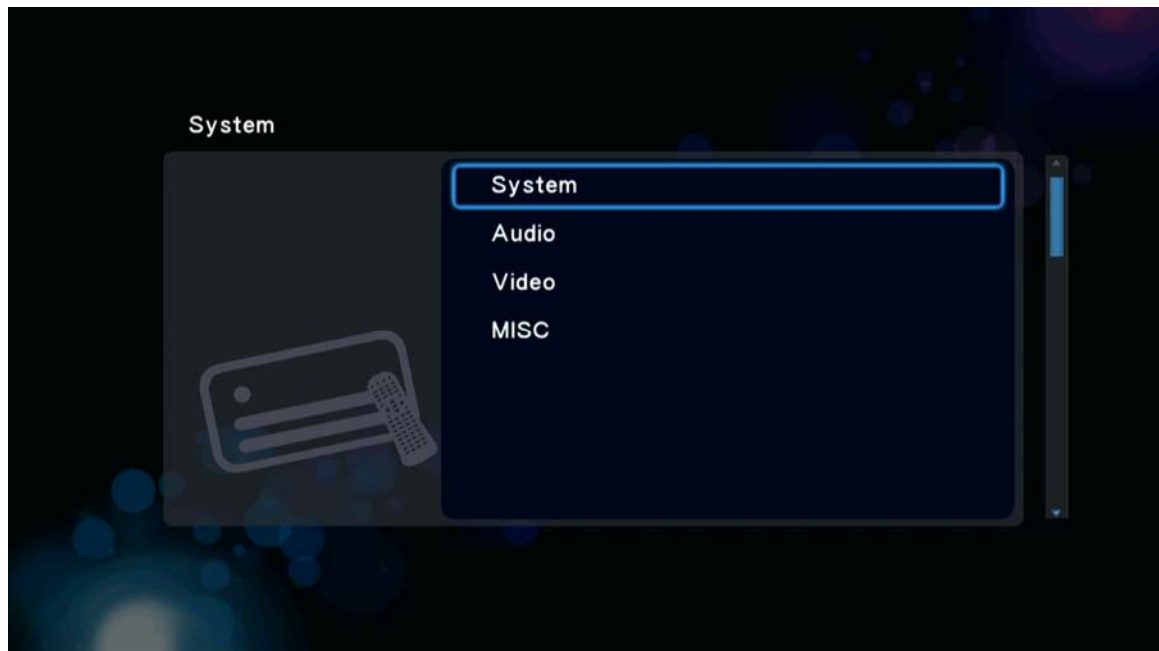4.5.2: You can copy, delete, move as many folders as you want
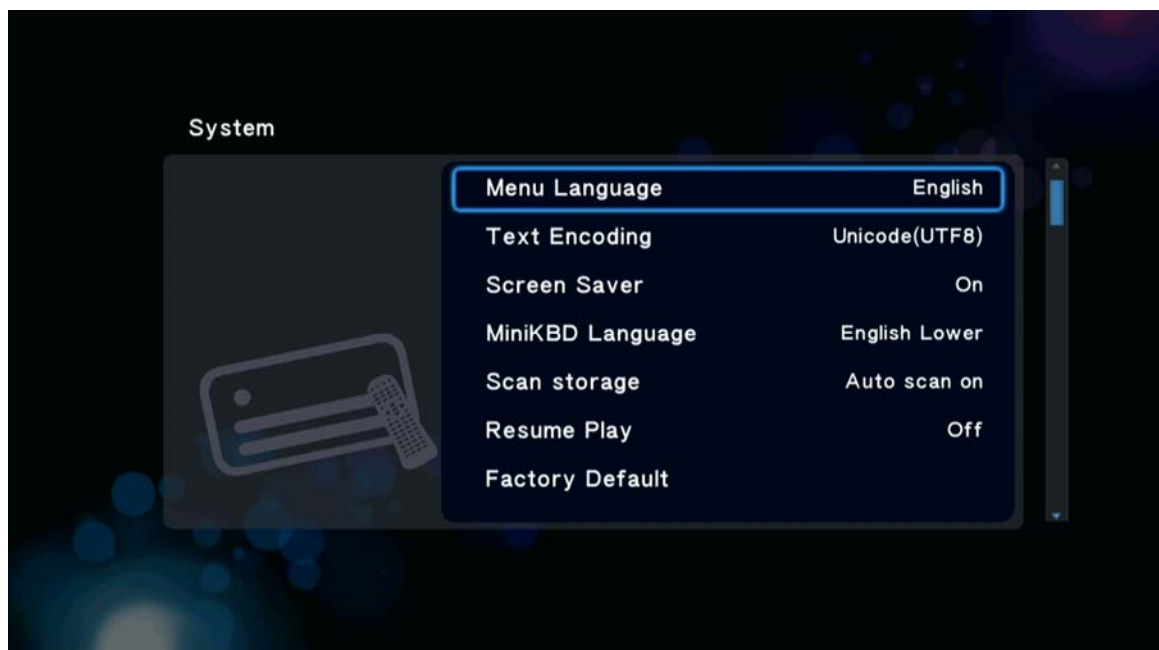

1) Press the color button can do it

4.6: System setup

4.6.0: System setup interface

4.6.1:System

Menu language:

Simplified Chinese/ Traditional Chinese

English/Spanish/Russian/Czech/Dutch/Italian/French/German/Turkish/Hebrew

Text Encoding: UTF-8, GBK…

Screen saver: it will display screen saver when the player is on stand-by
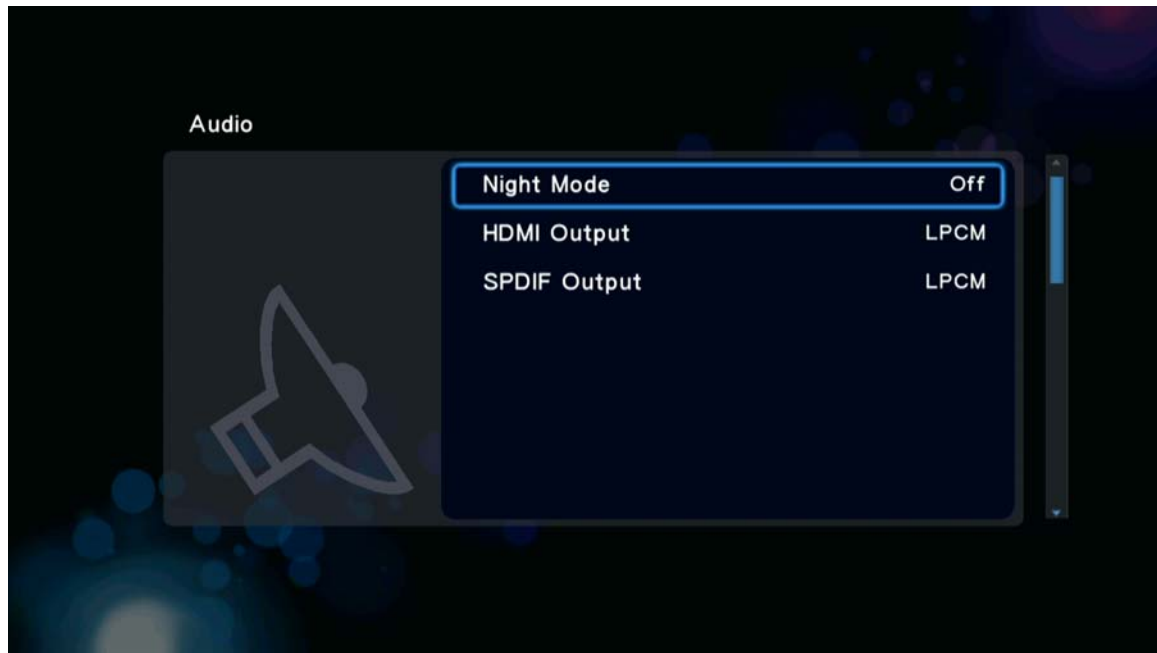
Minik BD language

Scan STORAGE: you can check if it is auto scan on

Resume play
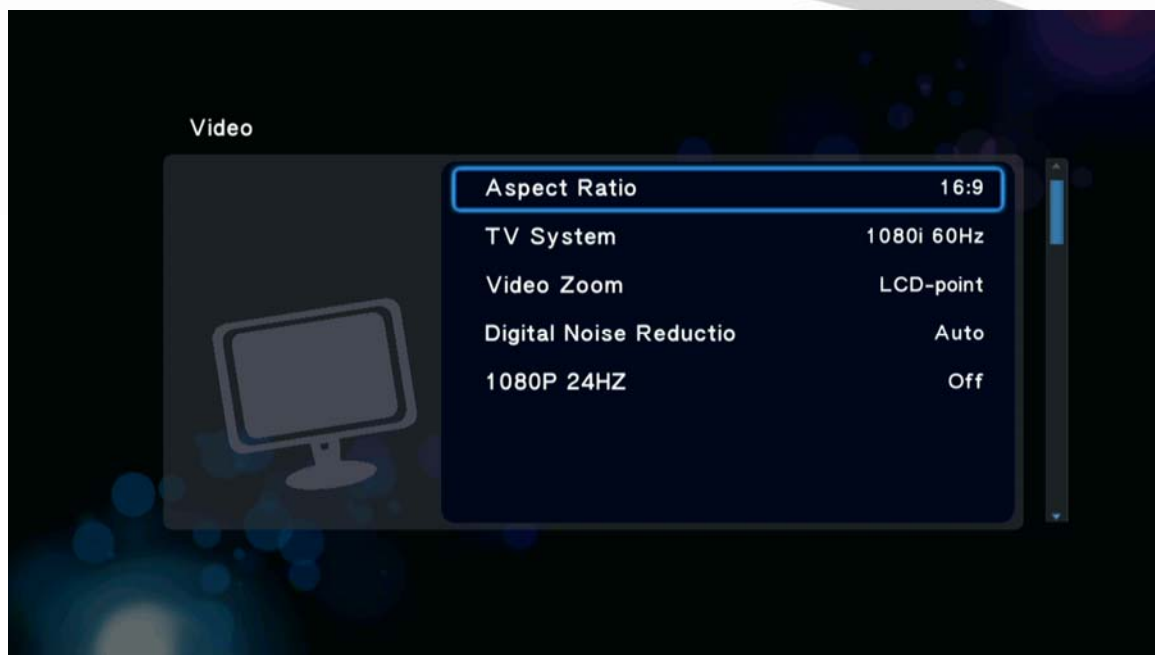
Factory Default

4.6.2: Audio setup

Night mode

HDMI output

SPDIF optical output

4.6.3: Video setup

Aspect Ratio

1) You can press to change the aspect ratio

TV system

1)TV system setup: HDMI Auto : 1080P 60HZ

                NTSC : 480i

                PAL : 576i

4.6.4: Others

※ Software version information